


RevNo	Revision note	Date	Signature	Checked
00	Sketch Only	04/14/2019		

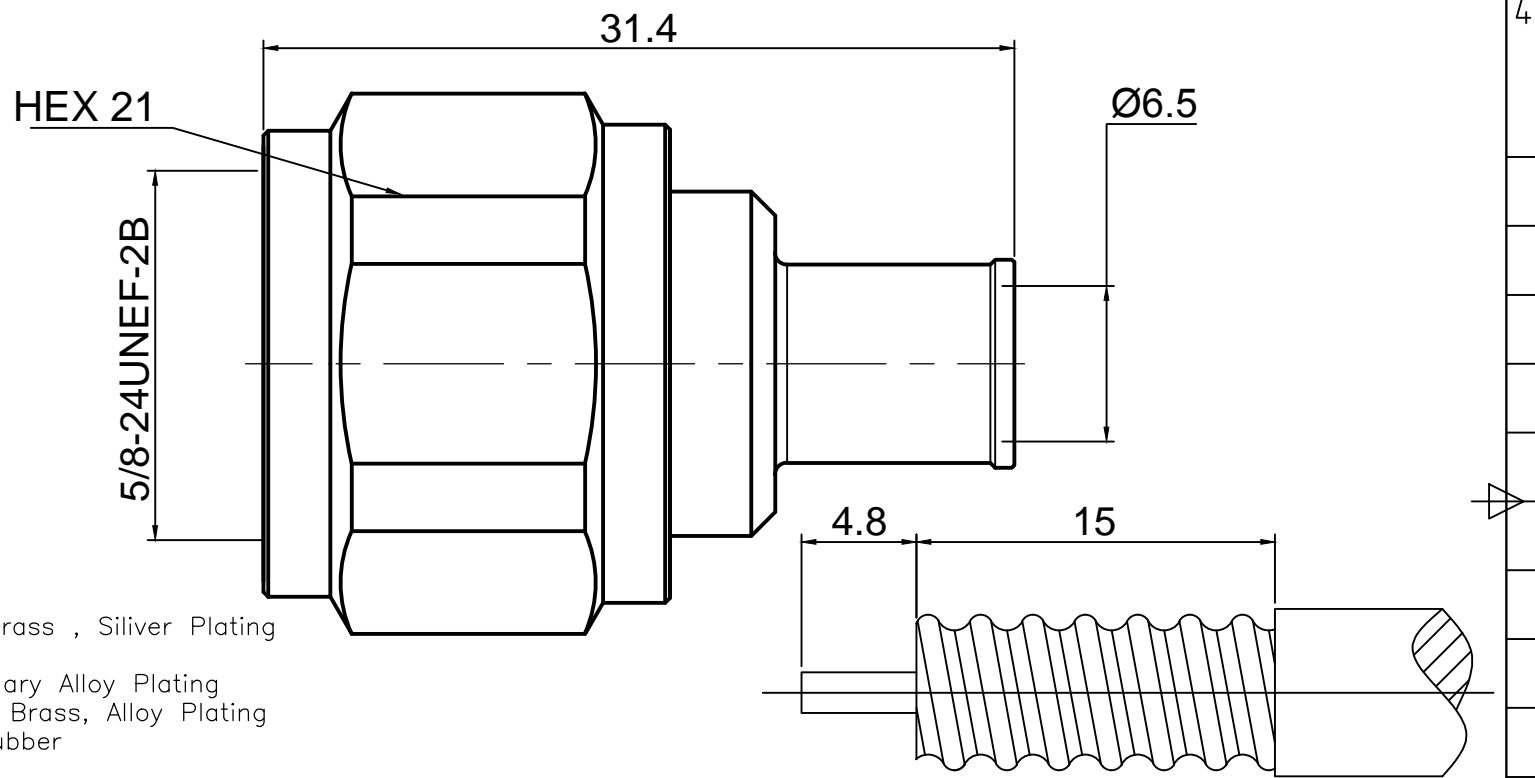

- Material & Finishing:
1. Center condutor: Brass , Siliver Plating
  2. Insulators: PTFE
  3. Body : Brass, Ternary Alloy Plating
  4. Other Metal Parts: Brass, Alloy Plating
  5. Gasket: Silicone Rubber
- Electrical Data:
1. Impedance: 50 Ohms
  2. Frequency: 0~3 GHz
  3. VSWR: 1.15 Max
  4. Voltage rating: 1000 Veff Max
  5. Dielectric withstanding voltage: 2500 Veff min

PIM: ≤ -155dBc(2\*43dBm)

**RoHS Compliant.**

ALL DIMENSIONS ARE IN MILLIMETERS AND [INCHES] Unit:mm

**RayNool**  
Raynool Technology Co., Ltd.

Title  
N MALE (No Welding) FOE  
SPP-250-LLPL CABLE

THESE DRAWING & SPEC. ARE THE PROPERTY OF Raynool AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.

UNLESS OTHERWISE NOTED ALL SURFACES FINISHED TO 64/ MAX.		
ALL TOLERANCES ARE:		
DECIMALS	FRACTIONS	ANGLES
x ± 1.0	±1/64	x' ± 1"
x.x ± 0.5		x'x' ± 0.5'
x.xx ± 0.1		

Drawn by	Ckd by	Appd by	Date 04/14/2019
Scale 3:1	Sheet 1 of 1	3650401 3.650.F401	